L.7. 59-94

G. R. S. IX-5]

Previous references.

1901-02
L.B)

File No. 48-01

Serial Nos. 1-2

Later references.

Pol. 206-10
105-13

GENERAL AND REVENUE SECRETARIAT.

Serial Nos. 1-2

Part B for June 02.

SUBJECT.

The cost of the Revenue Chavadi and ~~the~~ its purpose ~~of it~~.

Indexed

W D 88—GPB—50,000—24-7-16

(39)

L 2004

14945
6 MAY 1902
1890 to 02

FROM The President of Municipalities
Bangalore District

To The Secy to the Govt of Mysore
Revenue Depts.

Dated

Despatched 23rd May 1902

Received

General No.

No. 1-14.

Enclosure No. 3.

LB
48-01
No. 1

Submits for sanction an estimate for Rs 588/ for Constructing a revenue Chavadi in the Vadigenahalli Municipality in the Devanahalli Taluk.

L 7
26.5.02

H.V.K.
29/5/02

Draft docket pertg

H Gl

31.5.02

DWC/1294 Vice-President of the
Municipalities in the
Bangalore District
Sn: 3.

Bangalore, 23rd May 1902

From M. V. Narayana Rao Avl
President of the Municipalities
Bangalore District.

To H. V. Nanjundappa Esqr. M.A. M.L
Secretary to the Govt. of Mysore
Genl. & Rev. Depts.

Sir, I have the honor to forward herewith, for sanction an estimate for Rs 588/- for constructing a revenue chavadi in the Vadigenahalli Municipality in the Devanahalli Taluk. Out of the cost of the estimate, Rs. 457/- may be met out of the provision under "VIII P. W." in the Municipal budget for 1901-1902 and the remainder will be provided for from the next year's budget of the said municipality, as the remaining provision under Public Works has already been allocated for works.

I have the honor to be
Sir
Your most obedient Servant,

Vice-President of the
Municipalities

CR.

4.57

No 559

536

Ground Plan.

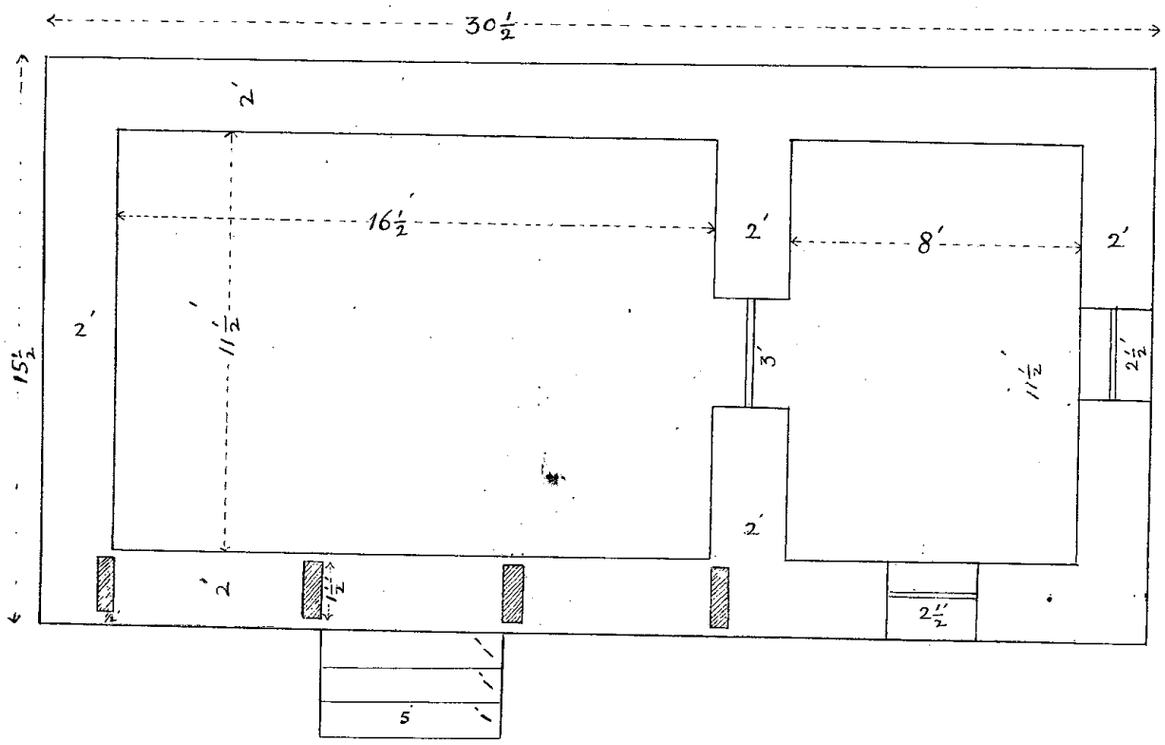

PL

OF

REVENUE

A

scale 5' = 1"

VADIGEN

Work Inspector
Devanahalli

N

HE

HAVADY

HALLI

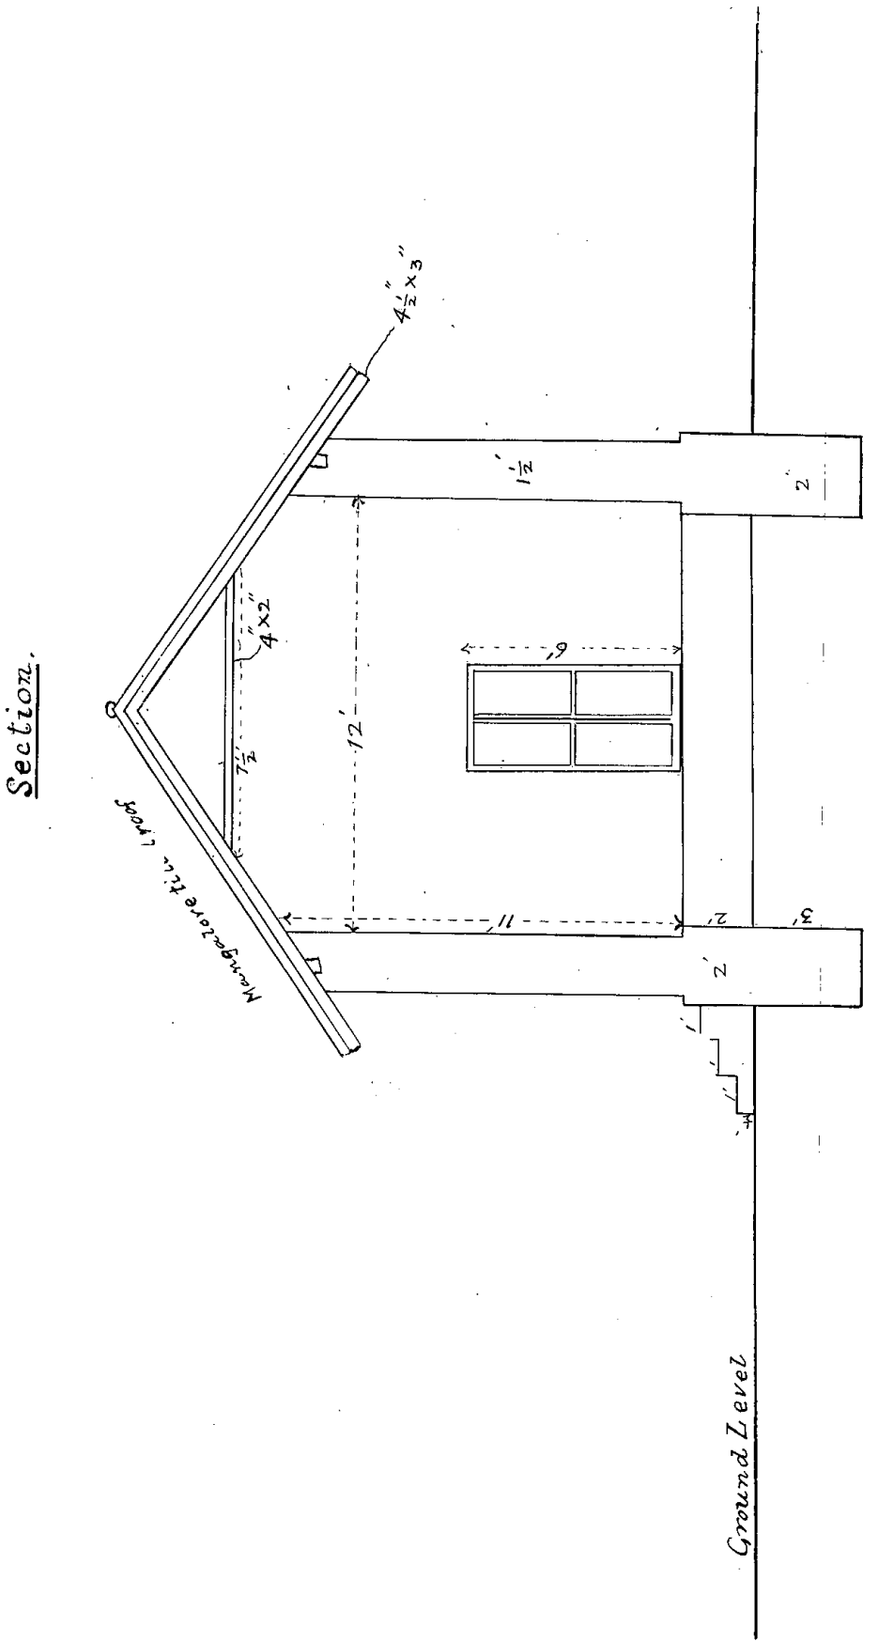

Estimated amount Rs 588/-

Amildar
Devanahalli
Taluk

Abstract estimate of the probable cost of constructing a Revenue Chavady at Vadigenahalli Town Devanahally Taluk.

Items.	Per	Rate			Quantity	Cost.
Earth work	cyd	-	2	-	21	3
Stone in clay	cft	-	1	9	2102/p	230
Burnt stone slabs	sq.ft.	-	2	6	203	32
Chunam painting	sqr.	1	8	-	18.71	28
nay wood work and wood oiling	cft	2	8	"	37	92
ngalore tiled roof reepers and ridge tiles	sqr.	18	"	"	6.82	123
Cornice 1' deep	Rft	-	5	-	72	22
Fixing Honnay wood door frame, bolt, hinges & complete	sq.ft	-	14	-	18	16
Honnay wood windows frame, shutters, iron bars & complete	each	7	-	-	2	14
Total Rupees						560
Contingencies at 5 per cent						28
Grand Total Rupees						588

(Countersigned) M. S. Narayen Row
Municipal President

True Copy

For Secretary

(40)

To.

The President of the
Municipalike within
Bangalore Dist

Dated. 10/6/02

No 19067
L.Dy. 59-94

His letter No 1294 d
the 23rd May 1902 ~~from~~
~~the~~ submitting an esti
mate for Rs 588 for
reconstructing a Revenu
Chavadi at Vadigenhalli
in the Devanhalli Taluk.

With reference to
the above has the honour
to enquire why the
Cost of the Revenue
Chavadi should be
borne by the Munici
pal Funds of Vad
genahalli, and how
and for what purpose

Rd. 1963.

From the Same
1417 9/4/6/02 L417

Ren LB
No 48-01
Dial No 2

the Chairman; if an
structed, would be
utilized.

An early reply is
requested.

By Order

7/6/1901
for Secretary

Orig 31/5/02

Note
The local authorities
know the urgency in
such cases much better
than the H.O generally.

7/6